

APPROVED	DATE	
BY	CLASS	SUBCLASS
DRAFTSMAN		

1 / 20

RECOMBINATION COMBINES  
OXYGEN GAS WITH ANODE  
MATERIAL

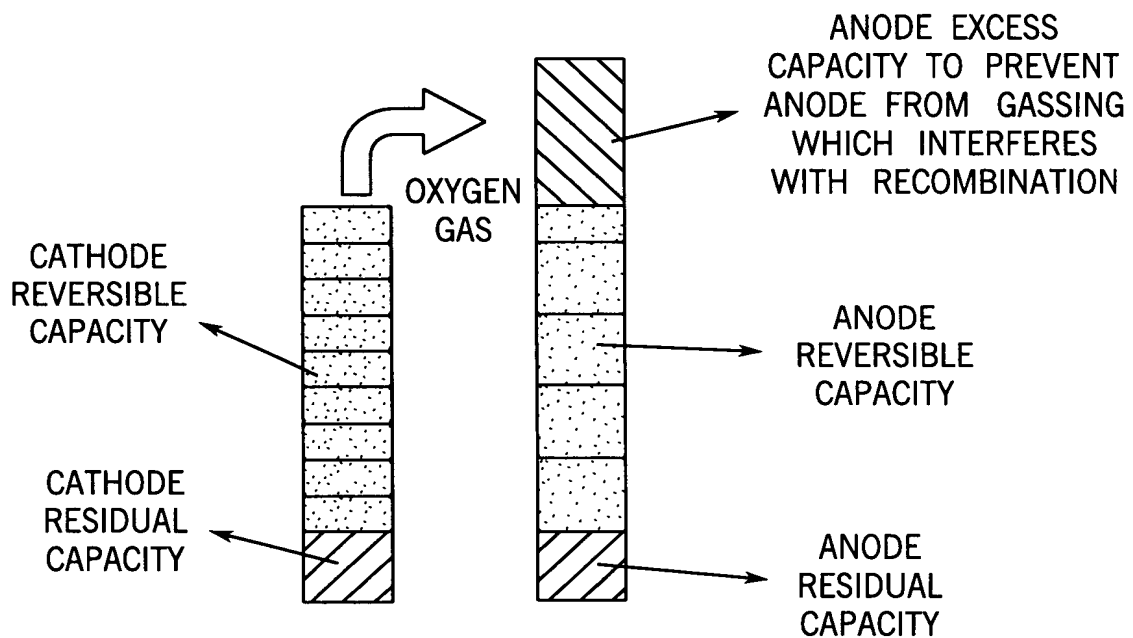


FIG. 1

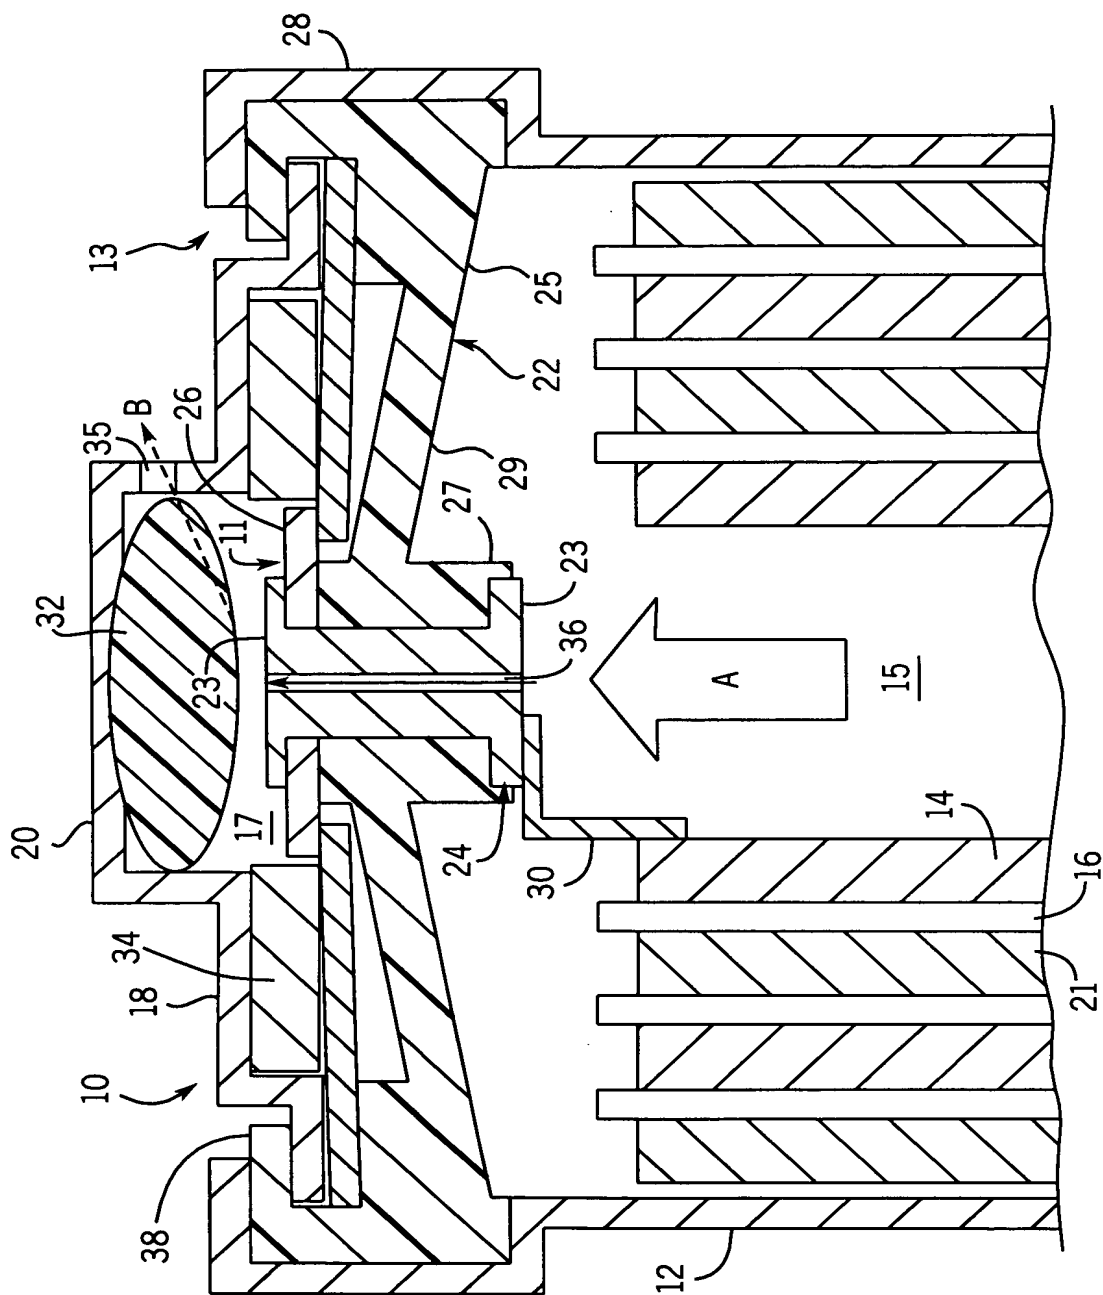


FIG. 2A

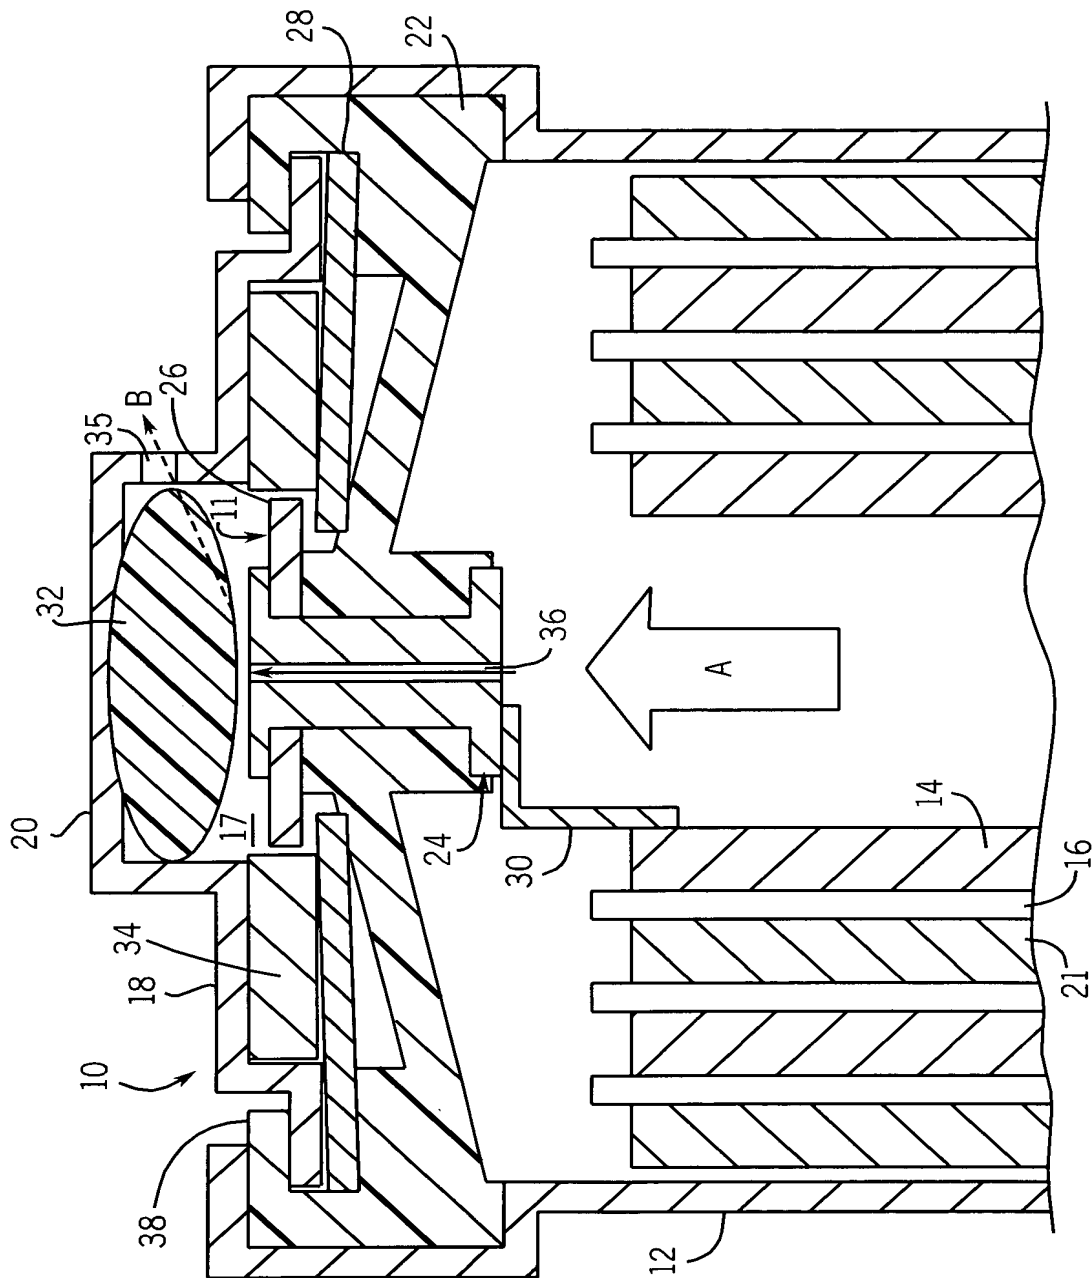


FIG. 2B



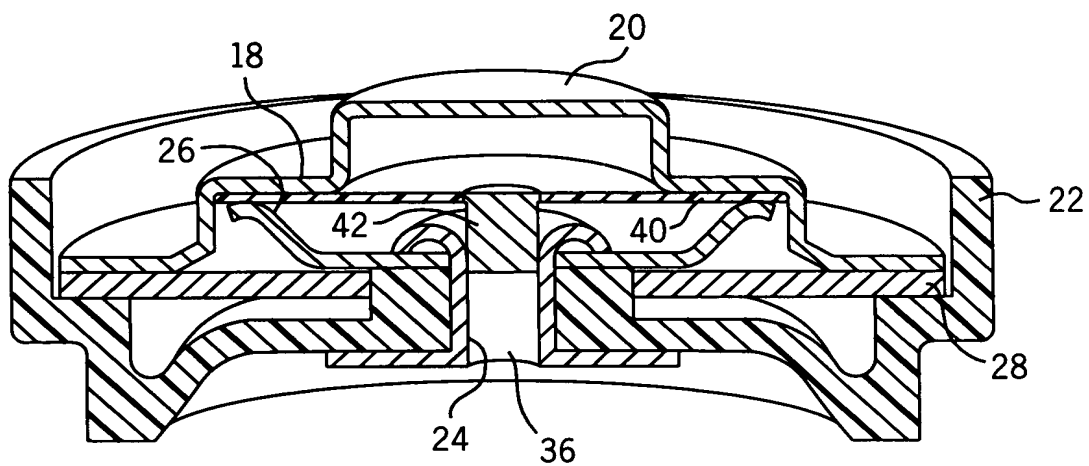


FIG. 3

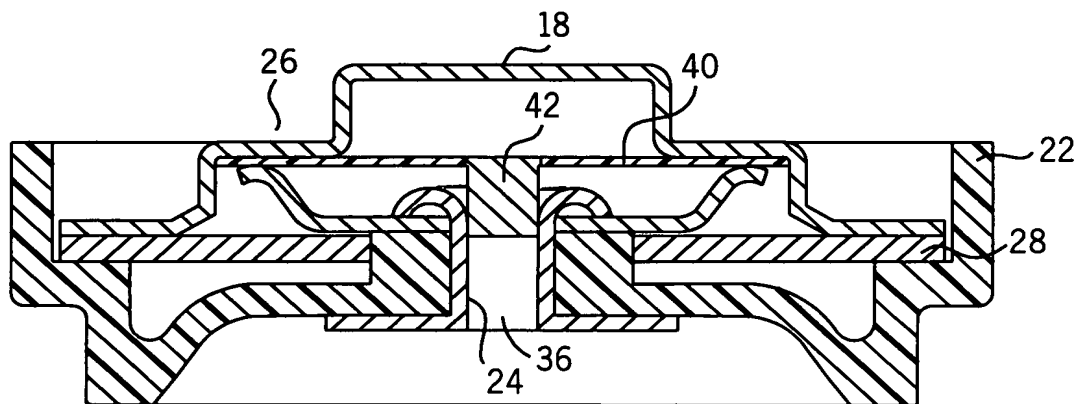


FIG. 4

FIG. 5


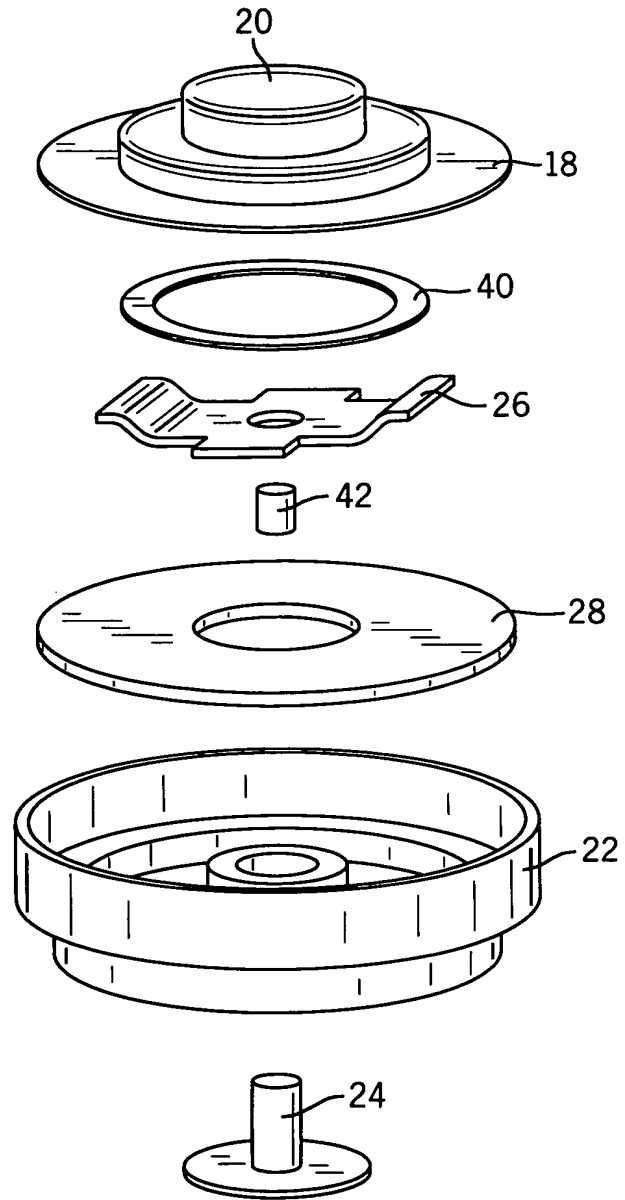


FIG. 6

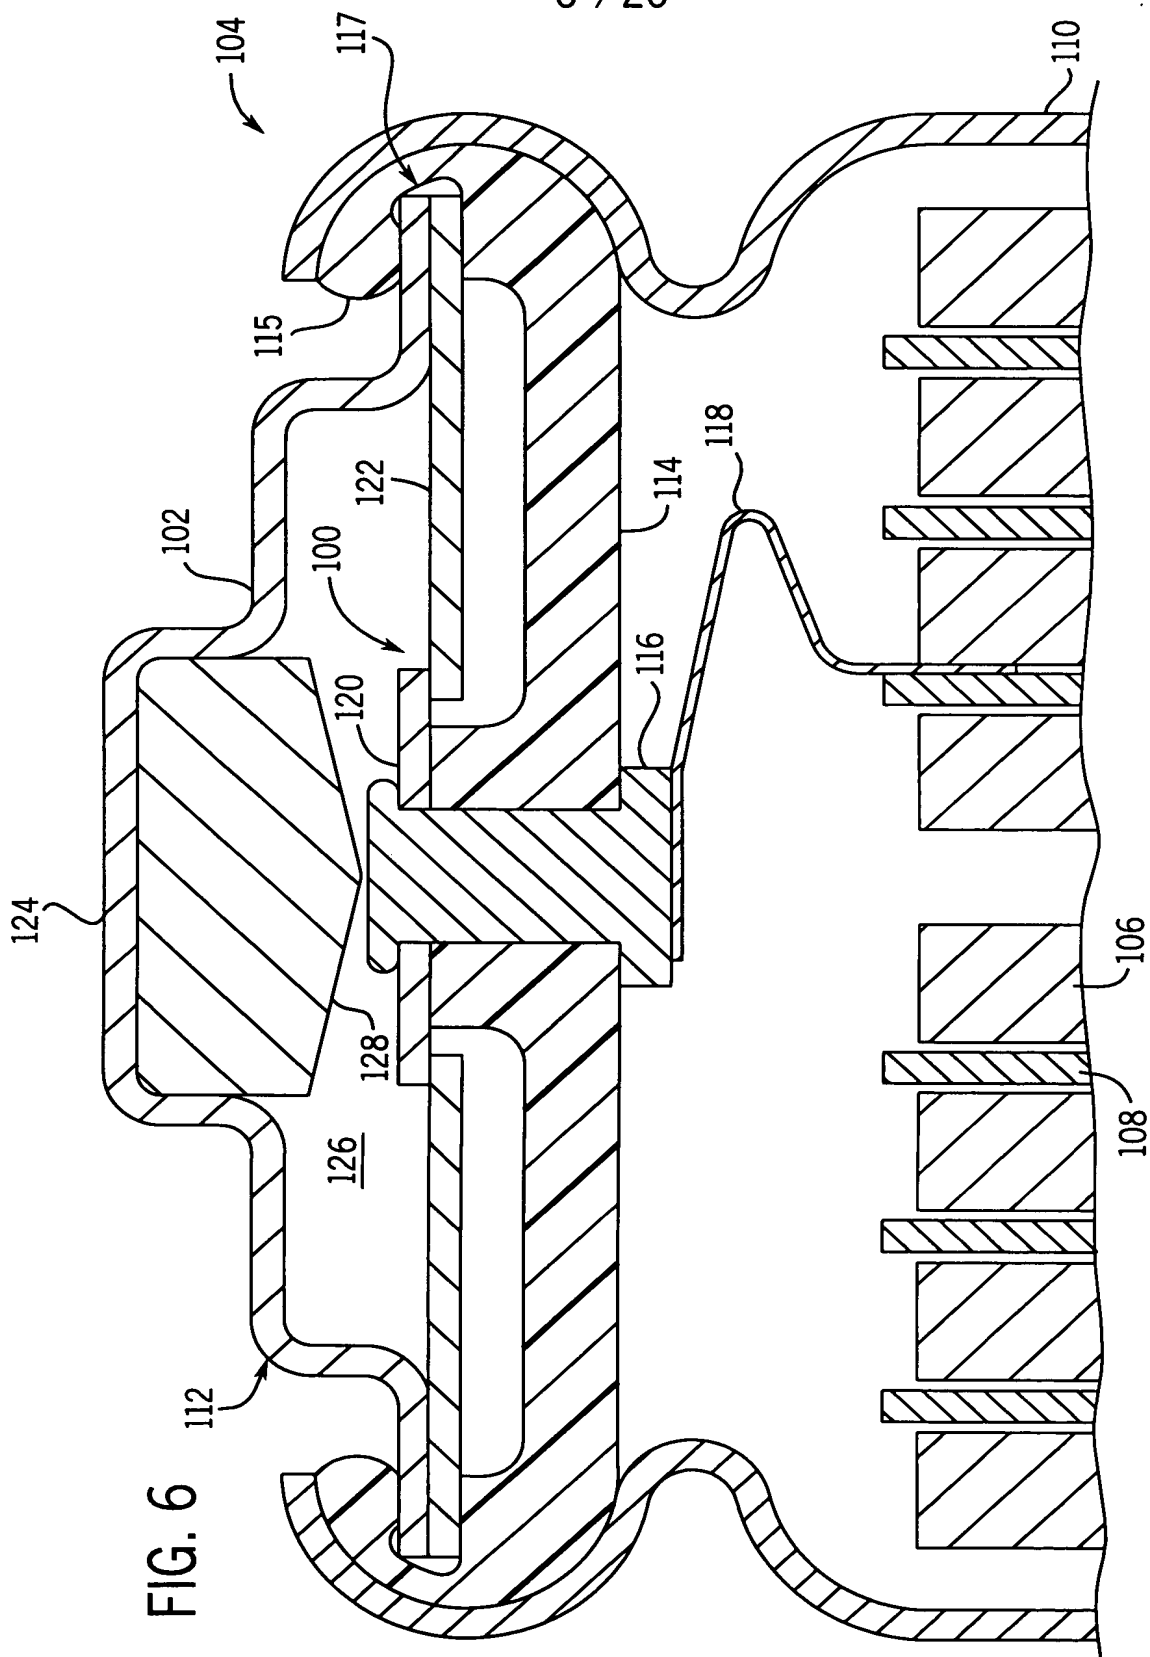

7 / 20

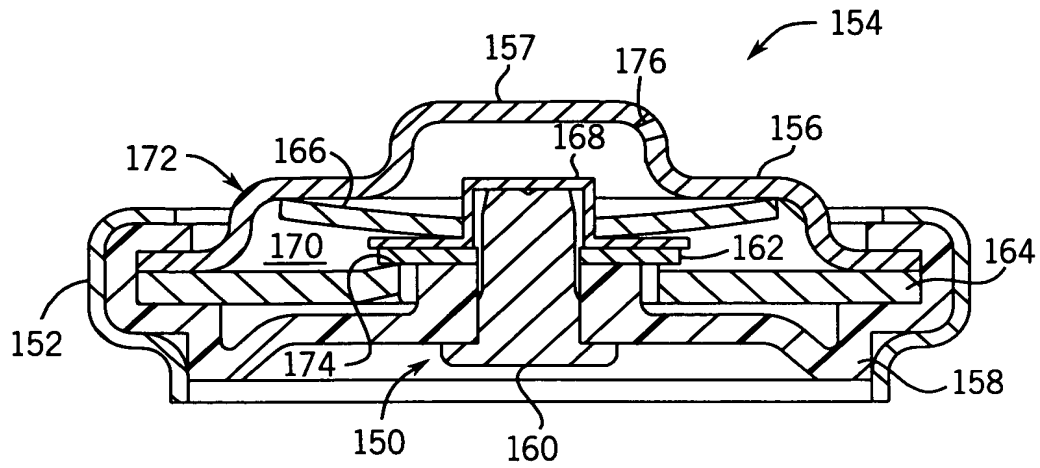


FIG. 7

FIG. 8

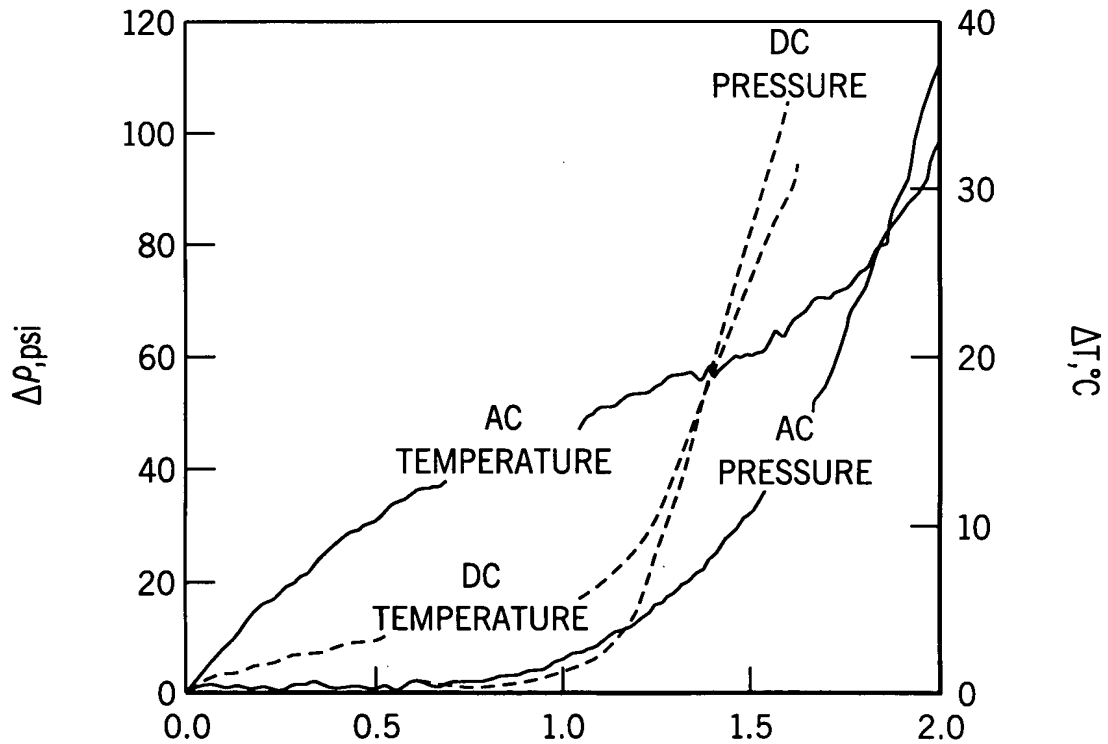


FIG. 9


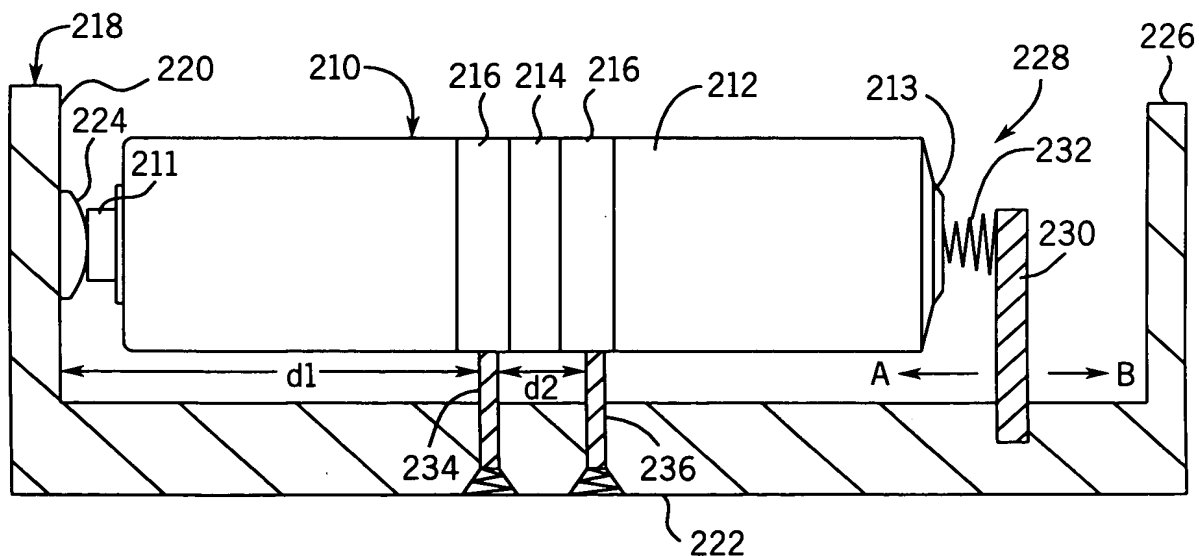


FIG. 10



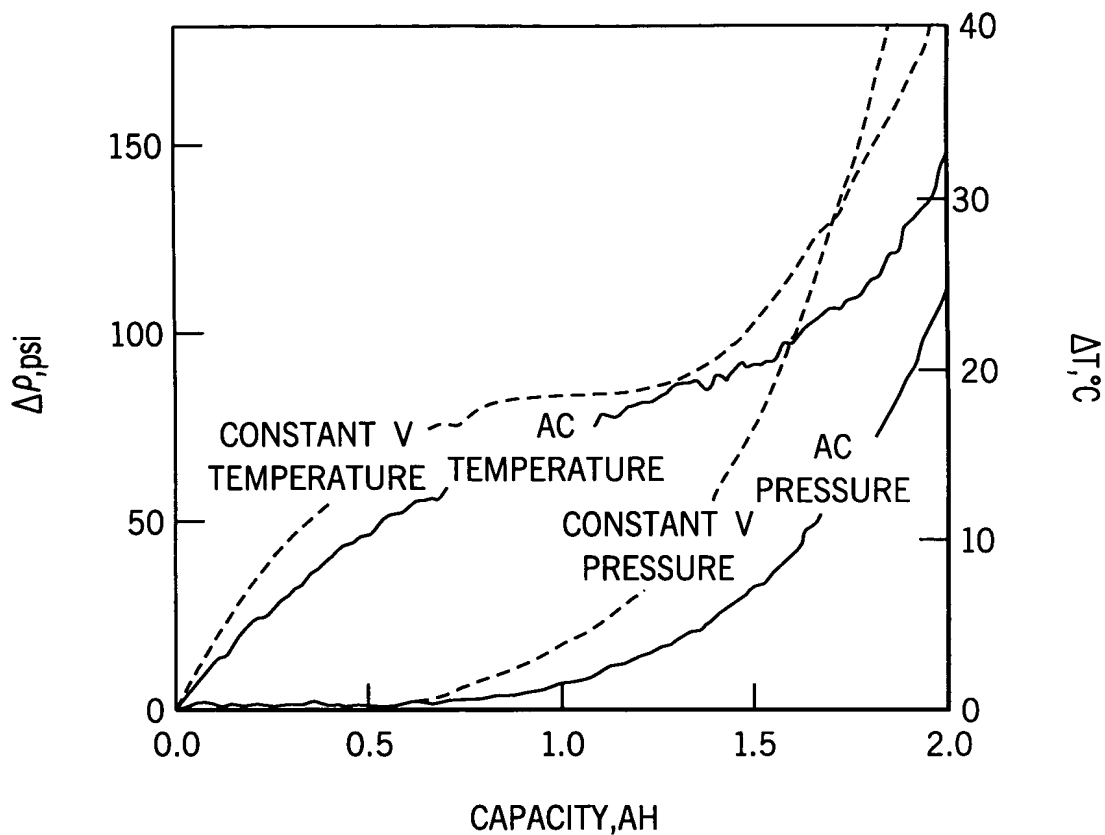

10 / 20

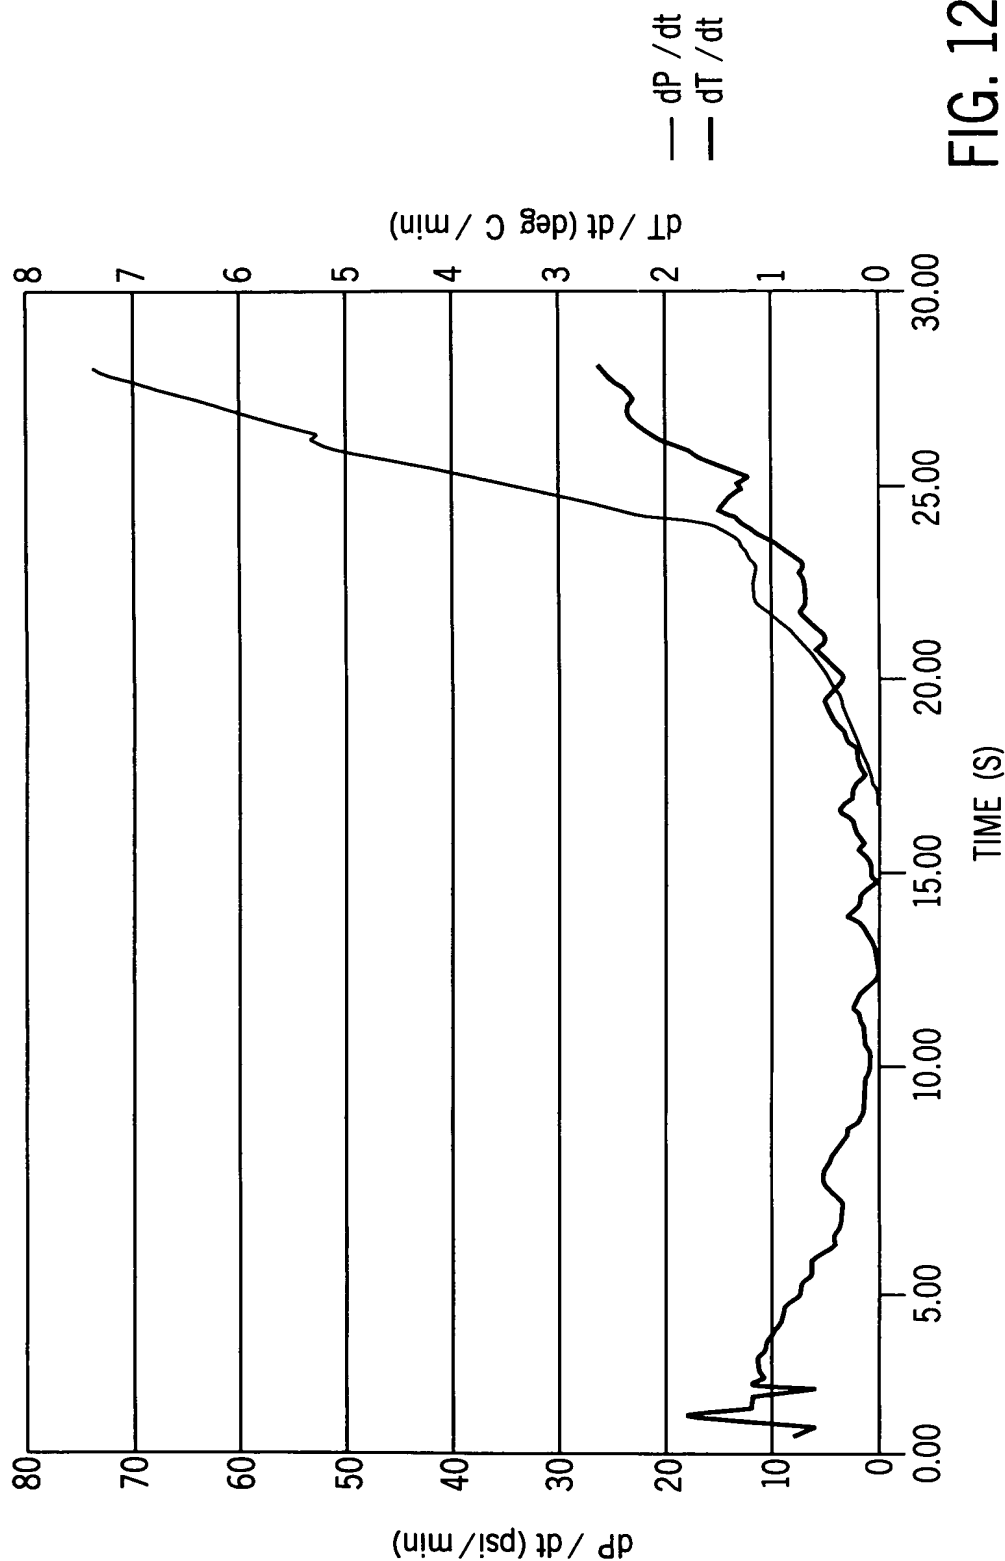


FIG. 12

11 / 20

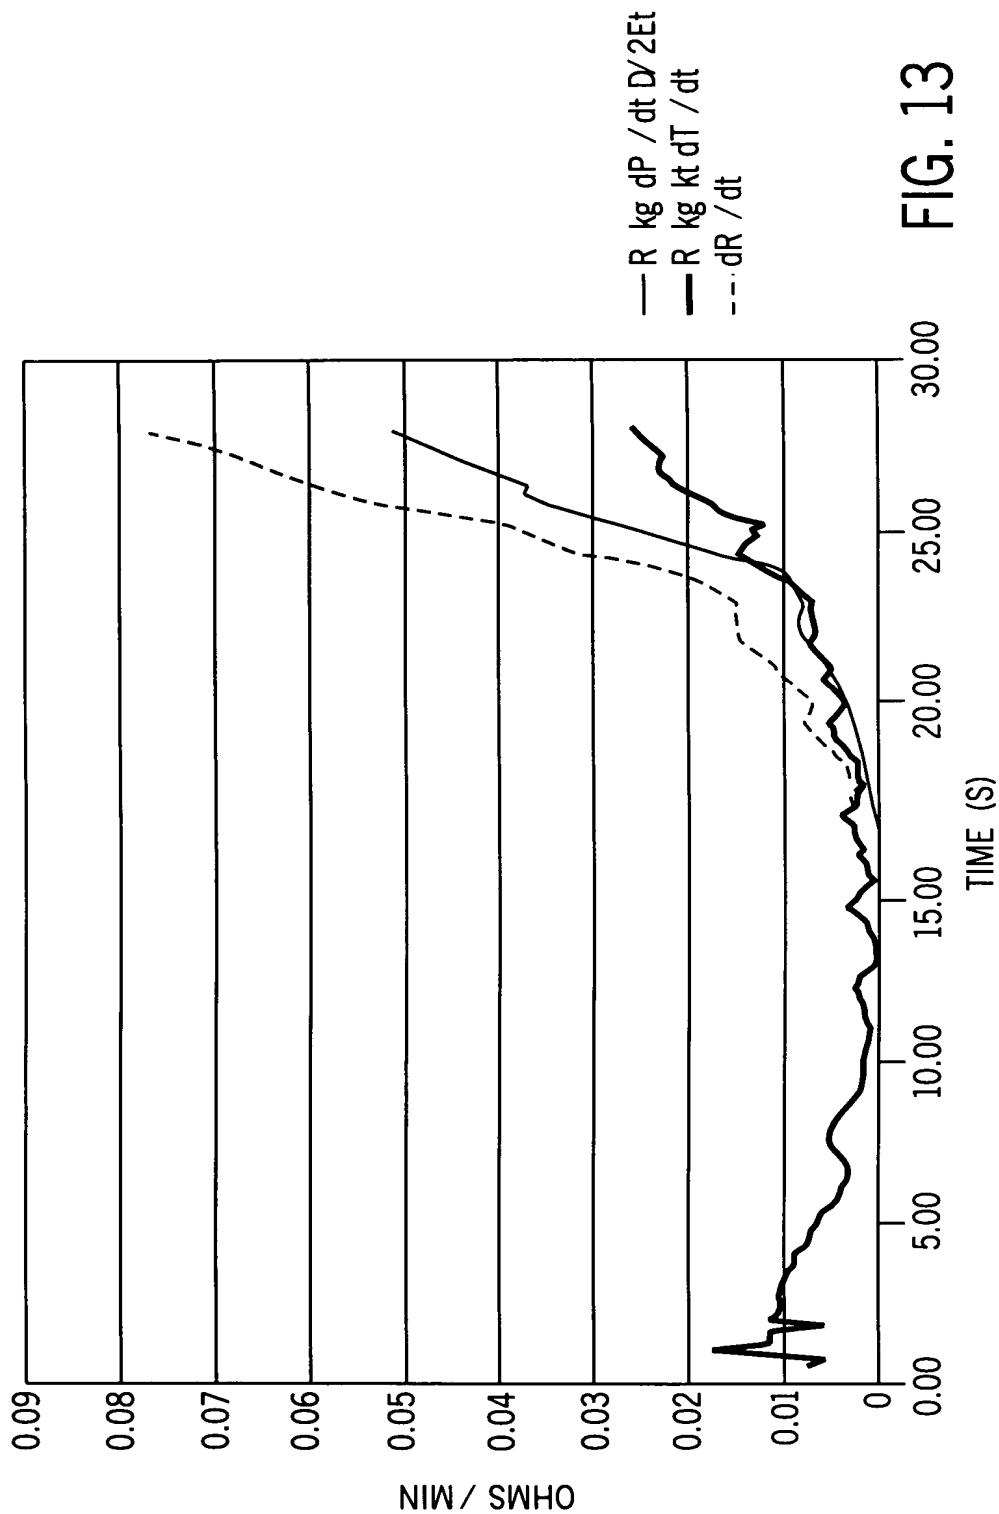


FIG. 13

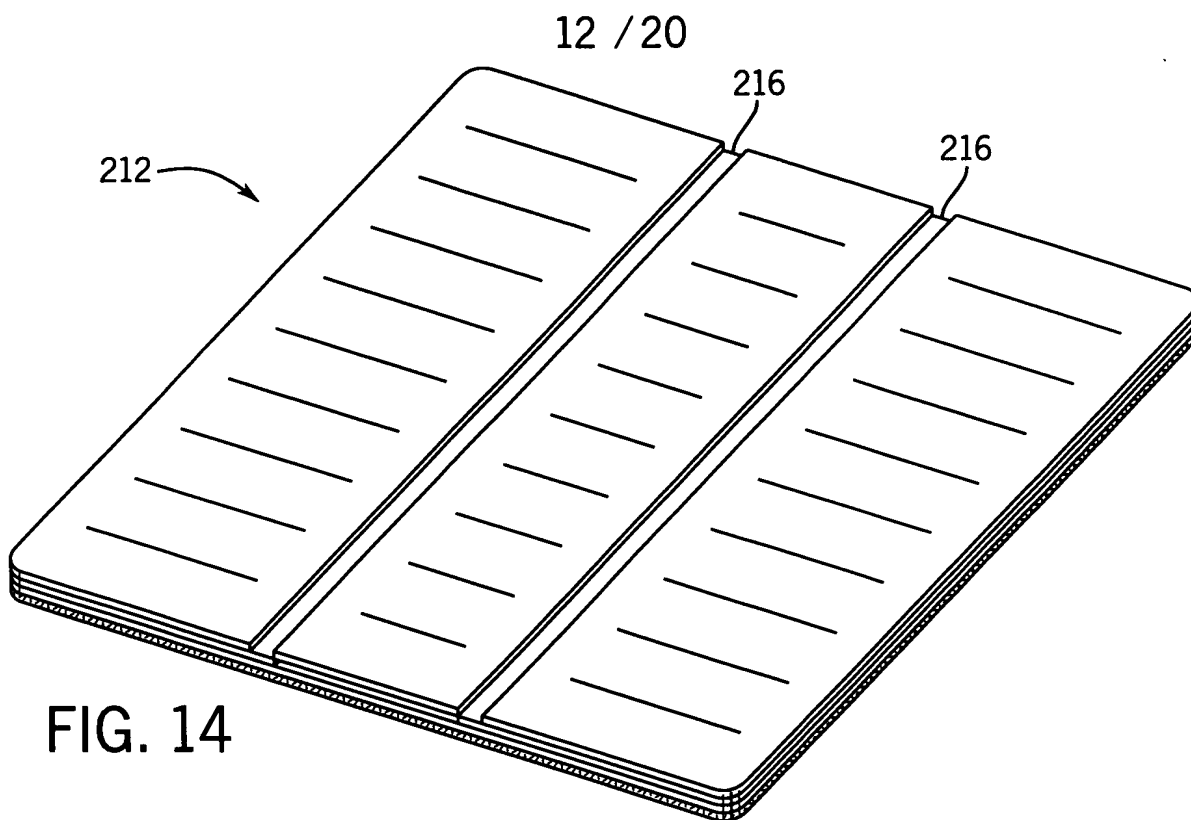


FIG. 14

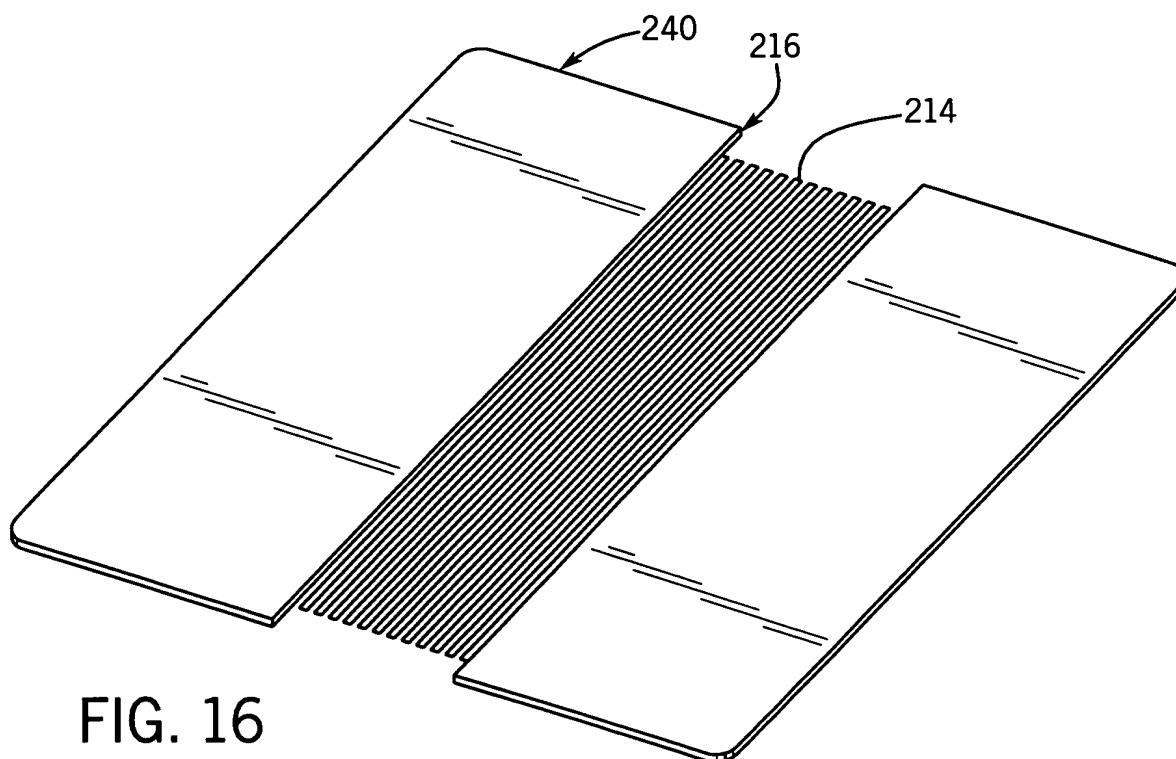


FIG. 16

13 / 20

FIG. 15


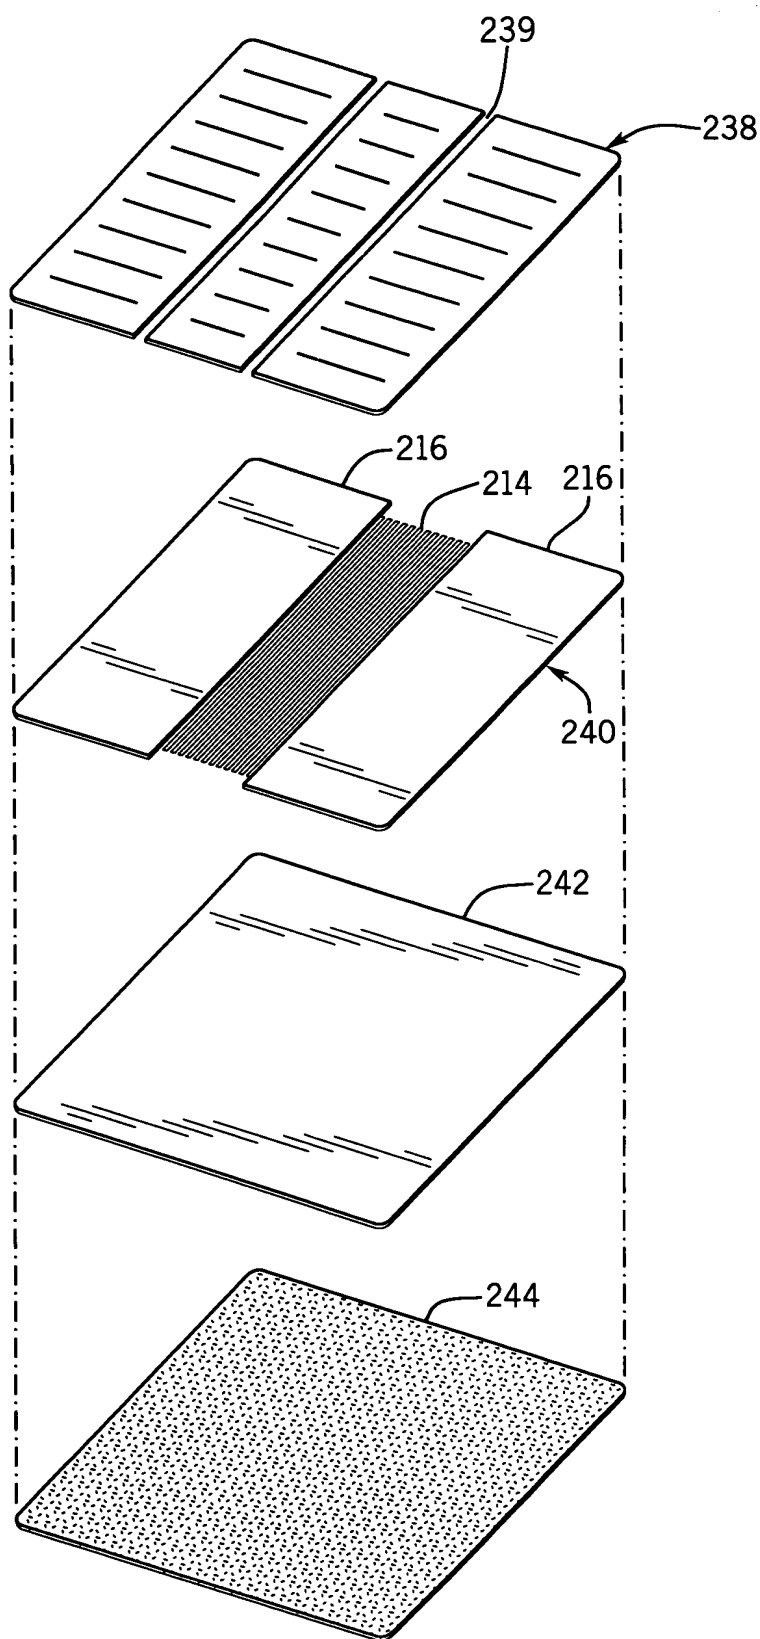


FIG. 17

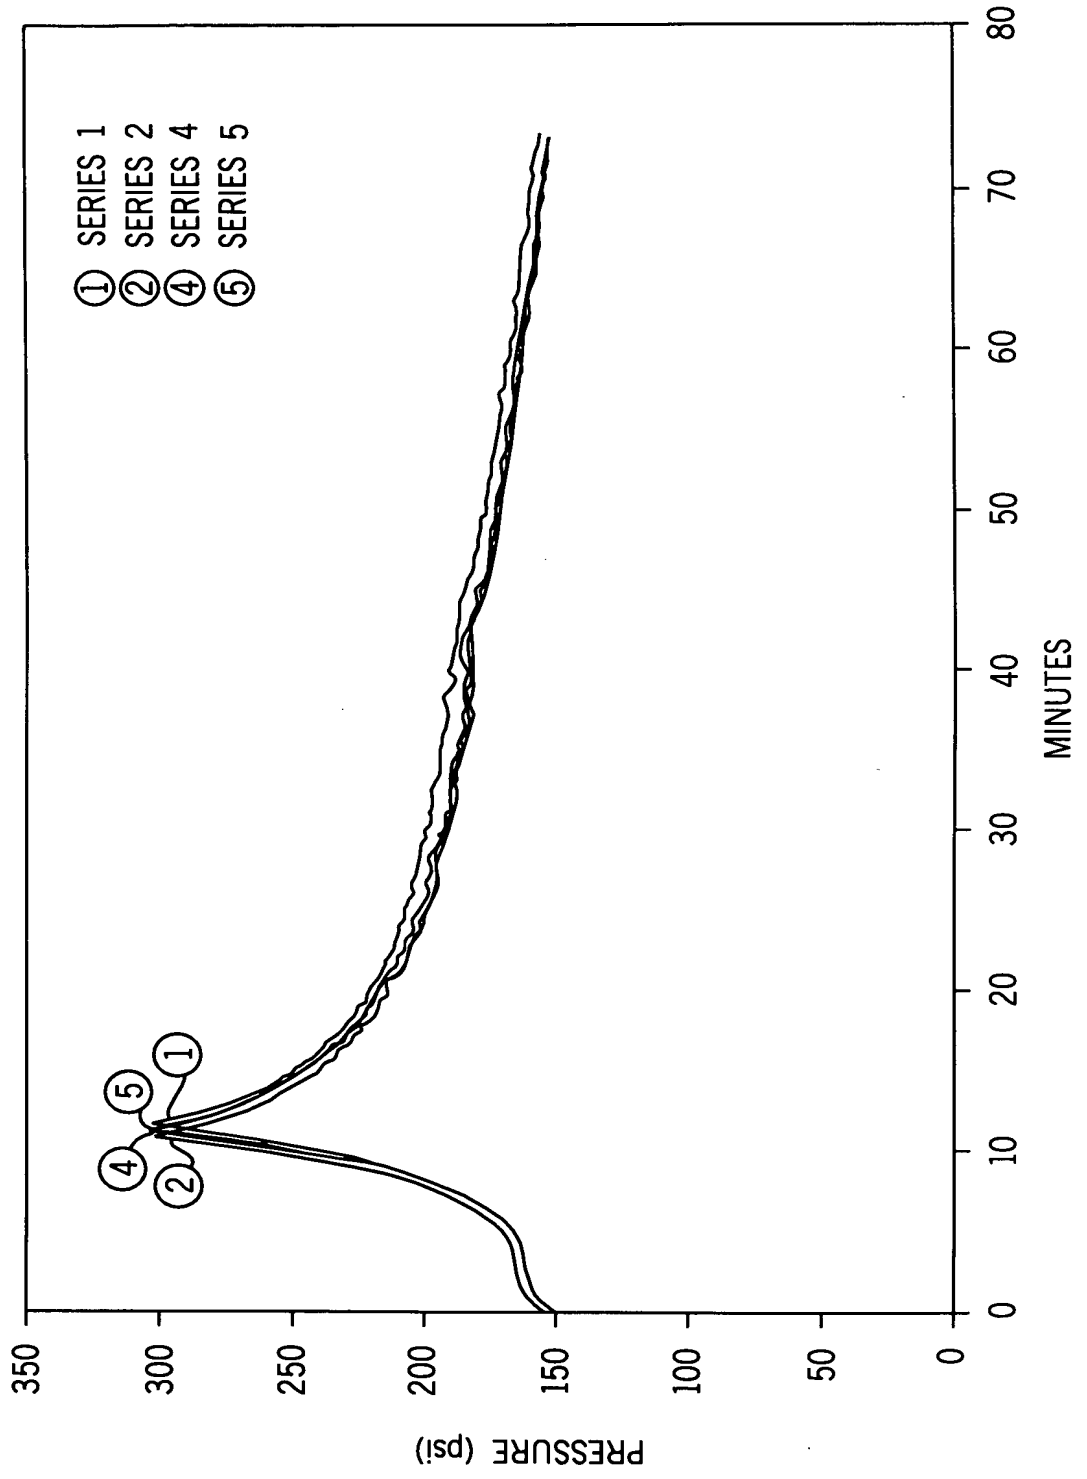

15 / 20

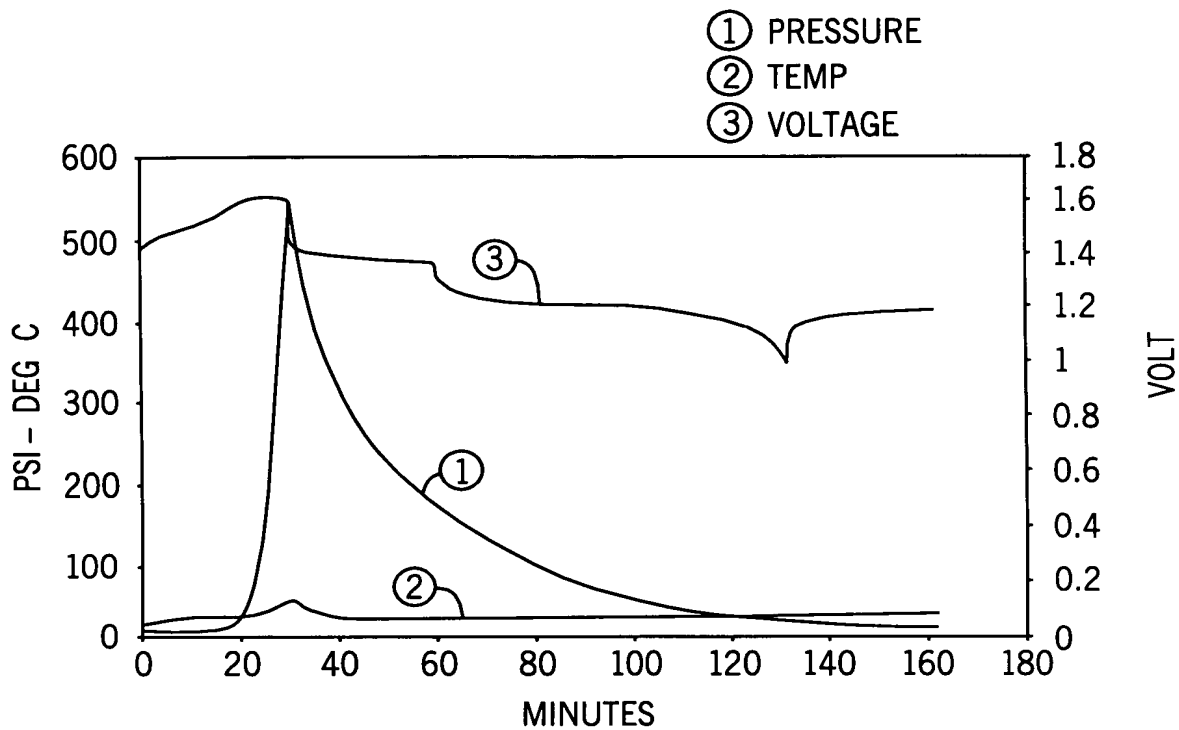


FIG. 18

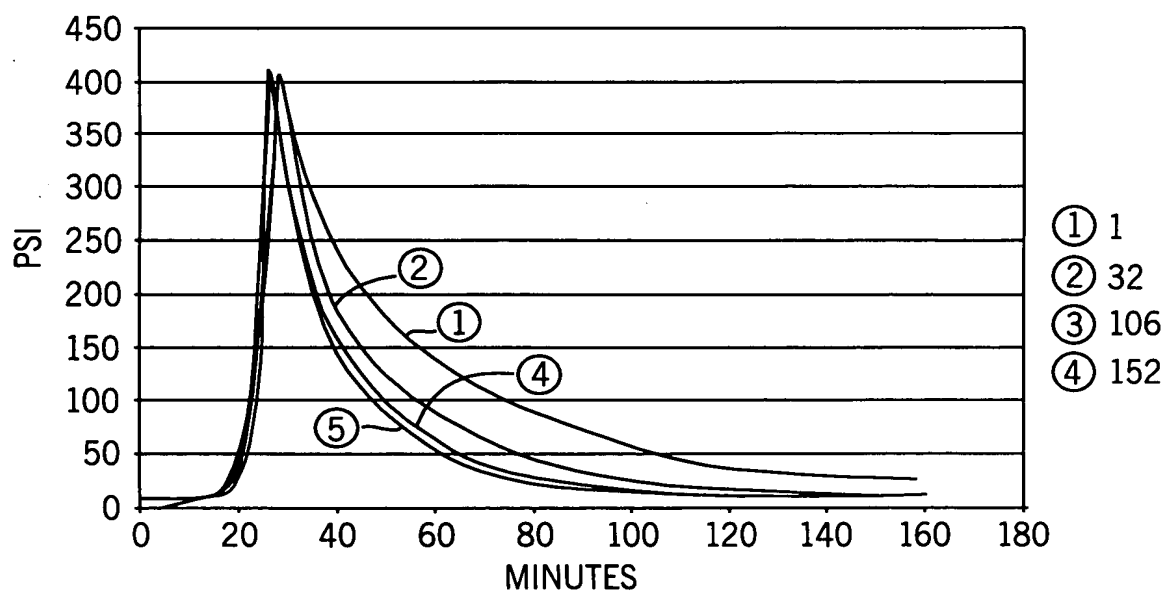


FIG. 19

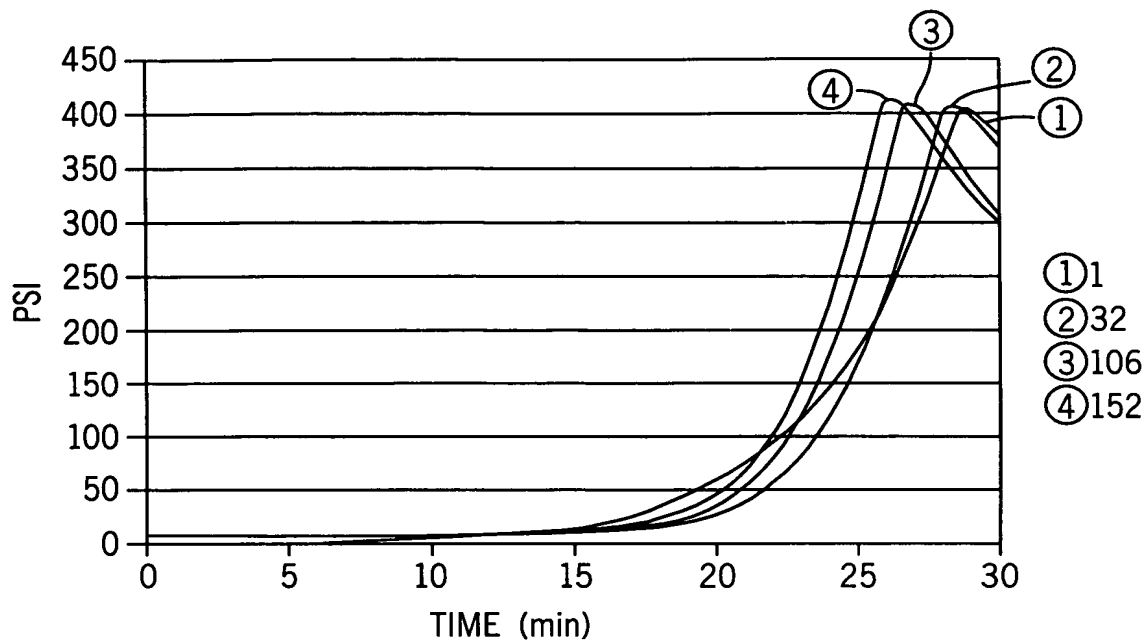


FIG. 20

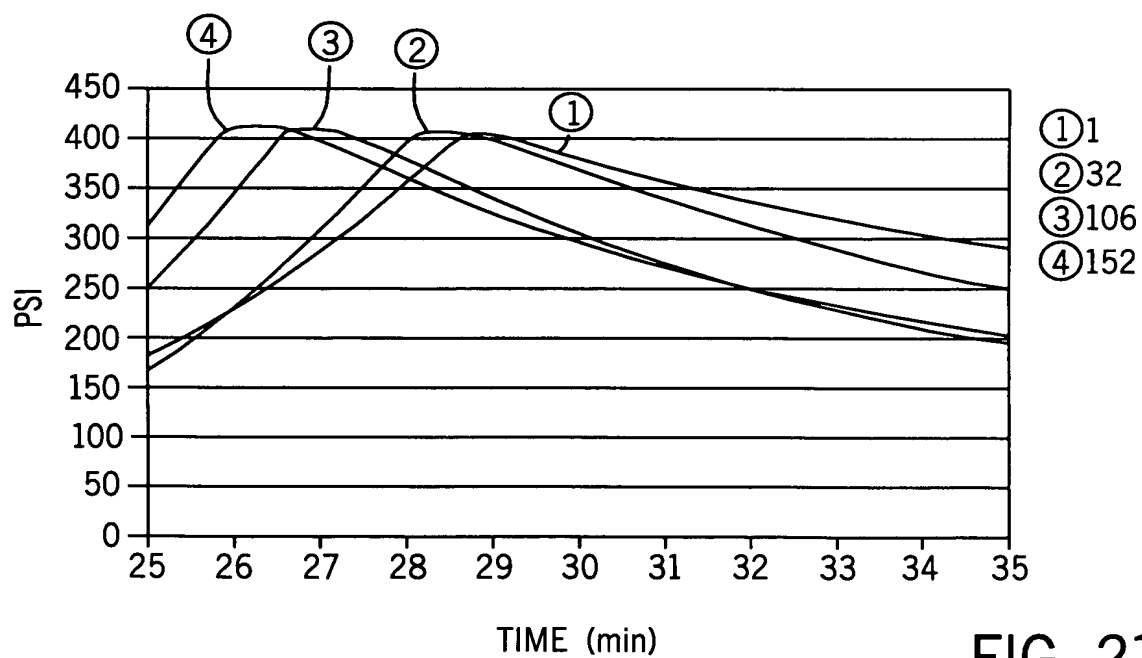


FIG. 21



17 / 20

- ① P cyc 151
- ② T cyc 1
- ③ P cyc 1
- ④ V cyc 151
- ⑤ V cyc 1

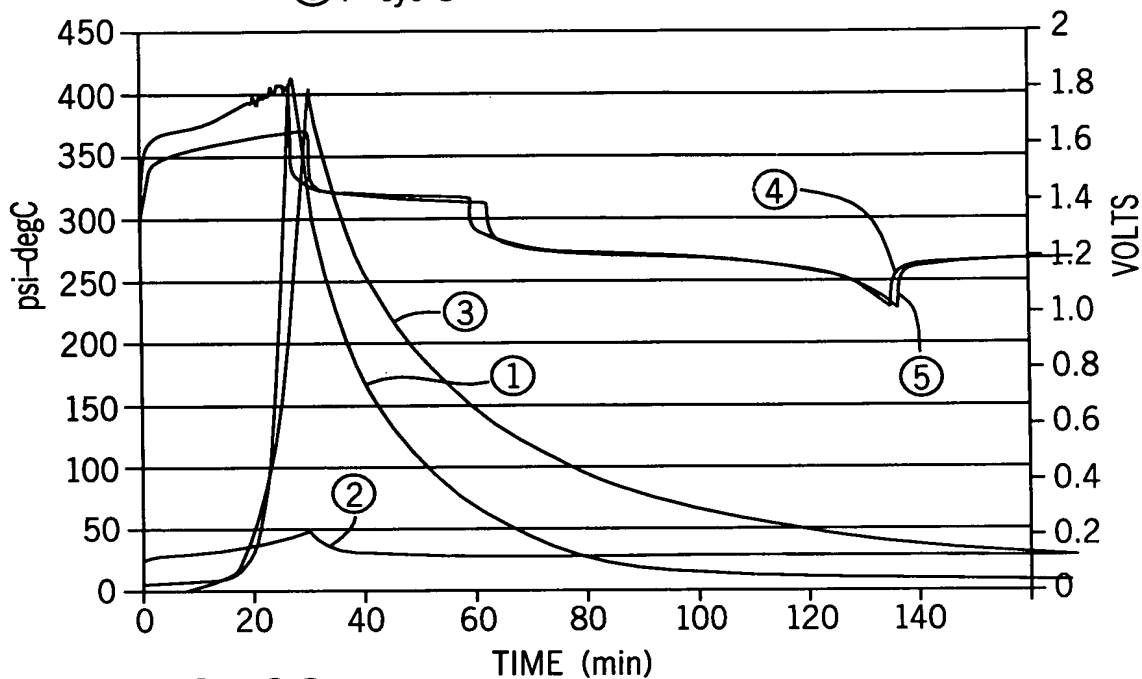


FIG. 22




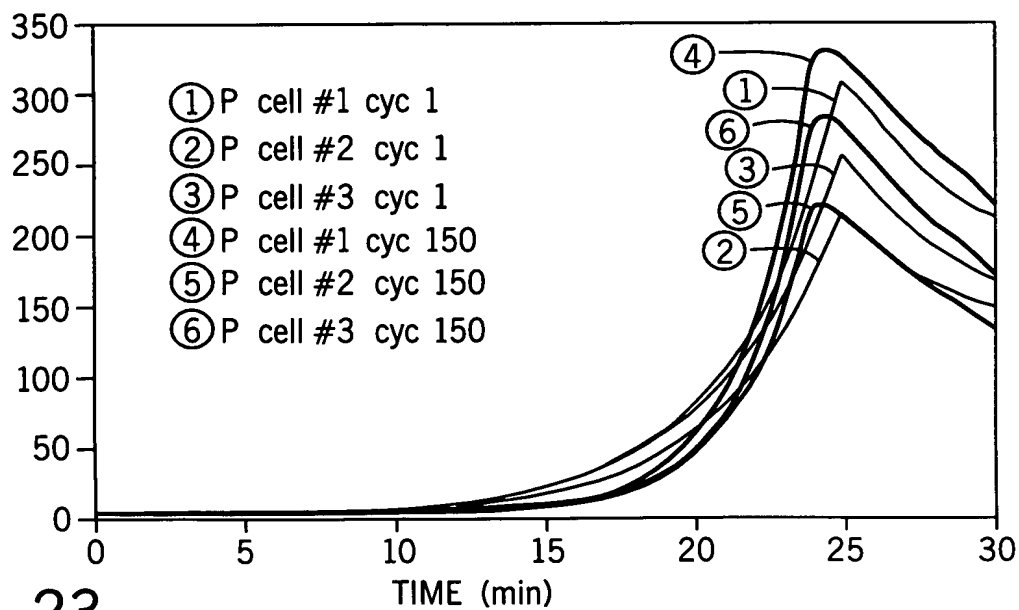


FIG. 23

18 / 20

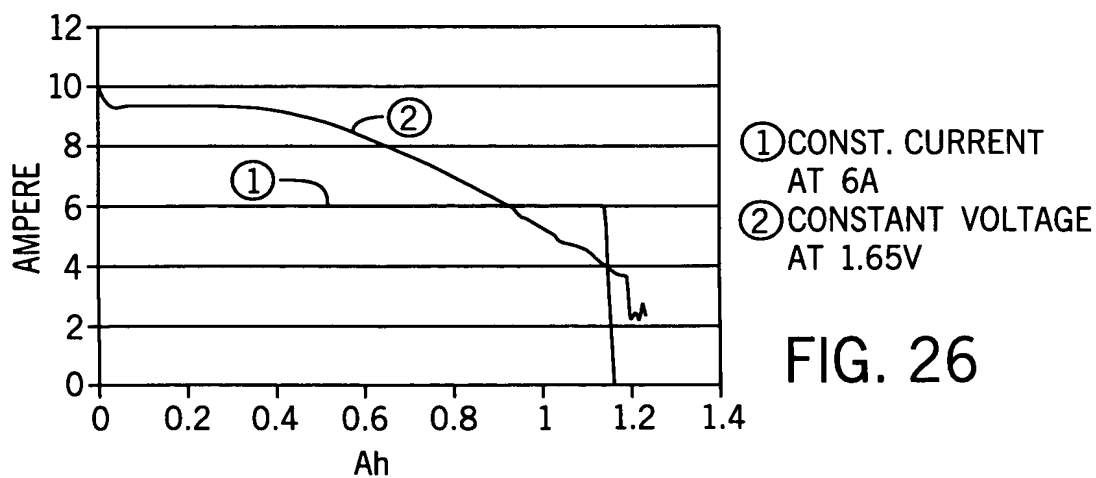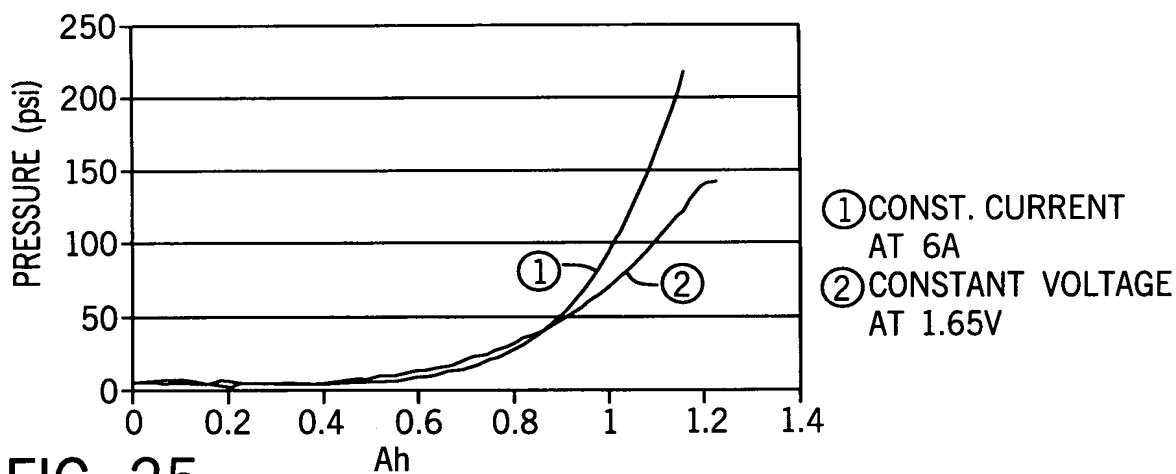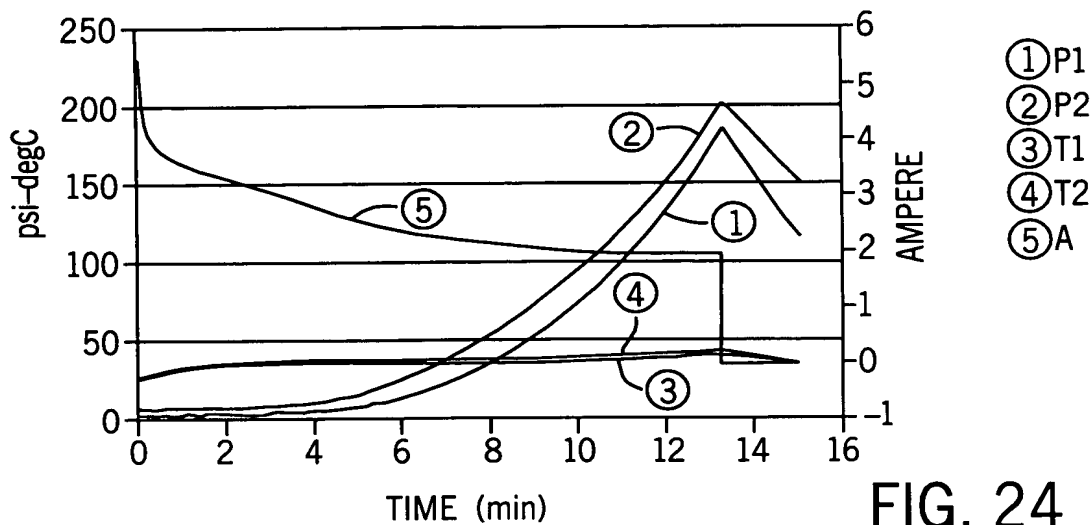

19 / 20

① CONST. CURRENT  
AT 6A

② CONSTANT VOLTAGE  
AT 1.65V

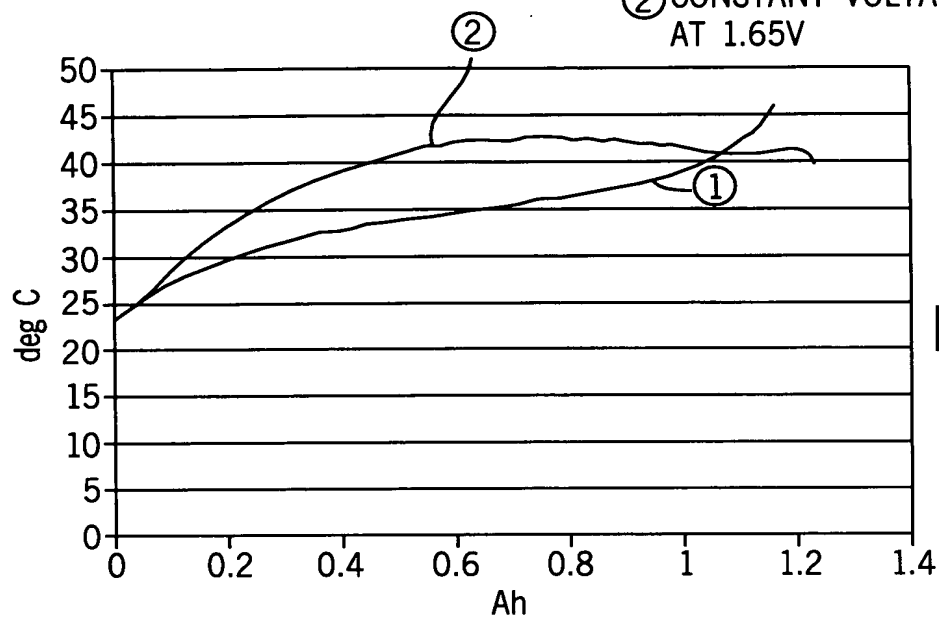


FIG. 27

① CONST. CURRENT  
AT 6A

② CONST. VOLTAGE  
AT 1.65V

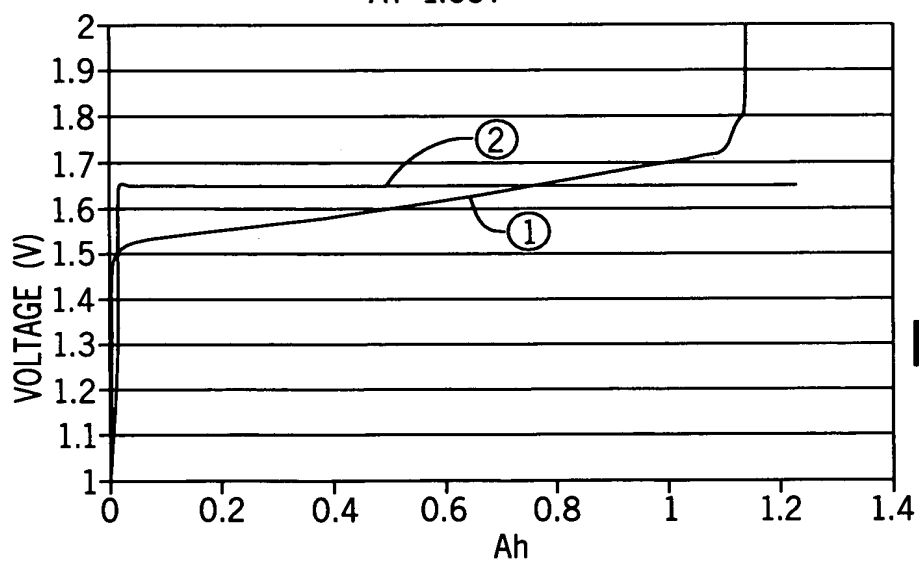


FIG. 28

20 / 20

- ① TEMPERATURE AT 1.6V
- ② TEMPERATURE AT 1.68V
- ③ Ah AT 1.6V
- ④ Ah AT 1.68V

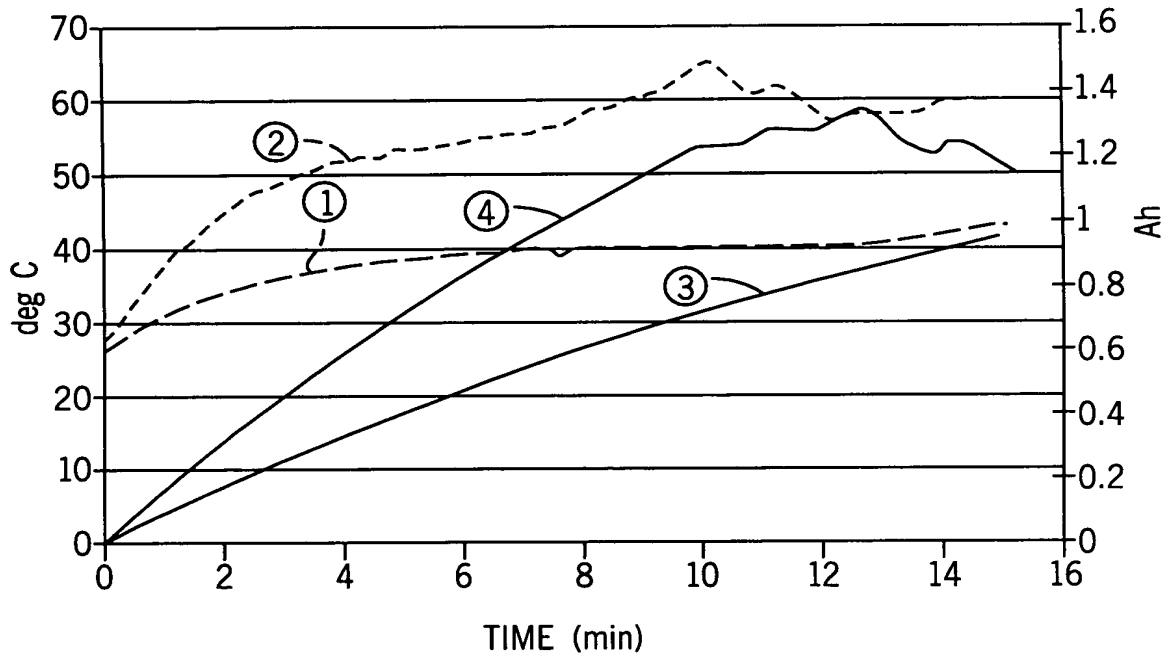


FIG. 29